

APOLLO RECESS

TECHNICAL DATA SHEET

APOLLO RECESS THE CEILING RECESS HEATER

INNOVATIVE DESIGN

The Tansun Apollo Recess is the part of the Apollo range of heaters, but has been evolved that one step further. The Apollo Recess is designed to fit into ceilings to create warm inviting commercial buildings.

Often wall space can be either limited or required for other functions, and this is where the Tansun Recess Apollo can provide an effective heating solution.

MAINTENANCE FREE

Once installed the Apollo Recess is virtually maintenance free. The heaters can be strategically placed so to avoid wasted heating areas, targeting the heat only where required.

COMFORTABLE HEAT

The Recess Apollo is suitable for a range of applications including hotel reception areas, offices, train stations and factories to name just a few. Additionally they can be used to provide a 'warm welcome' when entering many types of commercial buildings from shops to office reception areas.










APOLLO RECESS SINGLE

Available in: 1kW-2kW



MOUNTED AT 2.5M FROM GROUND IN A FACE HORIZONTAL POSITION

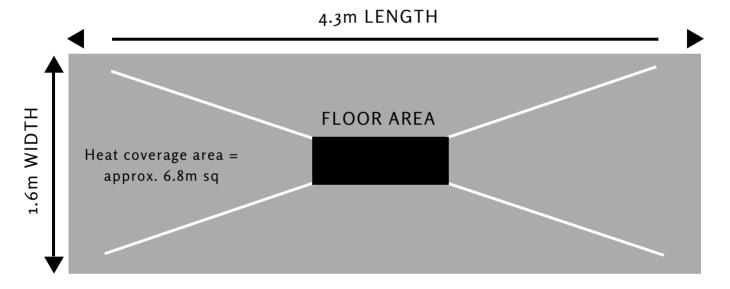


| Model (without guard) | Voltage (V) | Lamps x Power (kW) | Total Power (kW) | Minimum height from floor | Minimum distance from ceiling | Minimum distance from side wall | Weight without guard | Body Dimensions (W x H x D) (mm) |
|-----------------------------|-------------|-----------------------|---------------------|------------------------------|----------------------------------|------------------------------------|-------------------------|-------------------------------------|
| A1A 010IP | 230 | 1 x 1.0 | 1.0 | 2.0m | 0.15m | 1.0m | 3kg | 420 x 225 x 115 |
| A1A 015IP | 230 | 1 x 1.5 | 1.5 | 2.0m | 0.15m | 1.0m | 3kg | 420 x 225 x 115 |
| A1A 020IP | 230 | 1 x 2.0 | 2.0 | 2.0m | 0.15m | 1.0m | 3kg | 420 x 225 x 115 |

APOLLO RECESS

Available in: 2kW- 4kW



MOUNTED AT 3.0M FROM GROUND IN A FACE HORIZONTAL POSITION

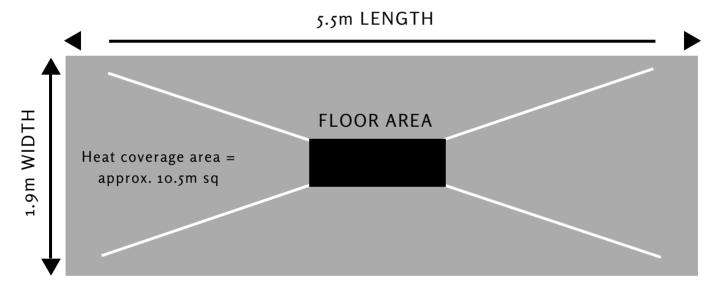


| Model (without guard) | Voltage (V) | Lamps x Power (kW) | Total Power (kW) | Minimum height from floor | Minimum distance from ceiling | Minimum distance from side wall | Weight without guard | Body Dimensions (W x H x D) (mm) |
|-----------------------------|-------------|-----------------------|---------------------|------------------------------|----------------------------------|------------------------------------|-------------------------|-------------------------------------|
| A1J 020IP | 230 | 2 x 1.0 | 2.0 | 2.5m | 0.15m | 1.5m | 6kg | 855 x 255 x 115 |
| A1J 030IP | 230 | 2 x 1.5 | 3.0 | 2.5m | 0.15m | 1.5m | 6kg | 855 x 255 x 115 |
| A1J 040IP | 230 | 2 x 2.0 | 4.0 | 2.5m | 0.15m | 1.5m | 6kg | 855 x 255 x 115 |

APOLLO RECESS TRIPLE

Available in: 3kW- 6kW



MOUNTED AT 3.5M FROM GROUND IN A FACE HORIZONTAL POSITION

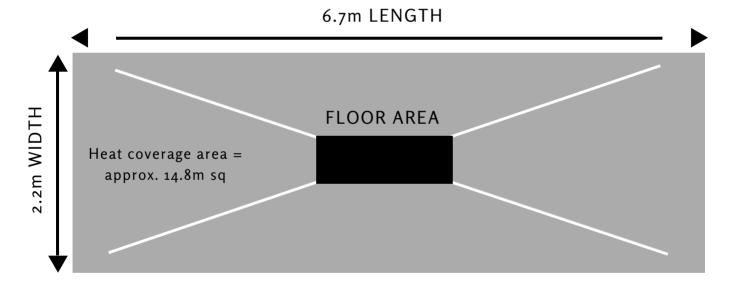

| Model (without guard) | Voltage (V) | Lamps x Power (kW) | Total Power (kW) | Minimum height from floor | Minimum distance from ceiling | Minimum distance from side wall | Weight without guard | Body Dimensions (W x H x D) (mm) |
|-----------------------------|-------------|-----------------------|---------------------|------------------------------|----------------------------------|------------------------------------|-------------------------|-------------------------------------|
| A1K 030IP | 230 | 3 x 1.0 | 3.0 | 2.5m | 0.15m | 1.5m | 8kg | 1280 x 225 x 115 |
| A1K 030IP | 230 | 3 x 1.5 | 4.5 | 2.5m | 0.15m | 1.5m | 8kg | 1280 x 225 x 115 |
| A1K 030IP | 230 | 3 x 2.0 | 6.0 | 3.0m | 0.15m | 1.5m | 8kg | 1280 x 225 x 115 |

APOLLO RECESS

APPLICATIONS INCLUDE:

Offices Reception Areas Train Stations Factories Warehouses & many more

